

GET THE MOST AT THE LEAST


The RP3150STAR is ideal for your large and widespread business needs while being cost effective as well. It also has a widespread support network with call center service facilities. Now increase business without increasing costs thanks to this efficient yet economical model printer.




RP-3150 STAR Thermal Receipt Printer



Gray Scale Printing
Graphic printing with
finer details



Auto-Cutter
1.5 million cuts; tear your
bills neatly



Drop-in Paper Load
Effortless
paper loading



Wall Mountable
Saves space
on the desk

Standard features at a glance:

- Low noise, high speed (150 mm/s)
- Internal Buzzer
- Support paper saving function
- Choice of interface : Parallel / USB / Ethernet / Wi-fi



RP-3150 STAR

Thermal Receipt Printer

INNOVATING FOR INDIA

Print

Print method	Direct Thermal Line Printing
Resolution	180 DPI x 180 DPI
Print width	72mm (Max.)
Print speed	Maximum 150 mm/sec.
Memory	RAM: 2MB, FLASH: 2MB (Standard)
Sensors	Paper Near End Sensor, Paper End Sensor, TPH Position, TPH Over Heating Protection, Print Voltage
Drivers	Windows drivers: Win2000/XP/2003/VISTA/2008/Win7/Win8) Linux: CUPS, MAC
Interface	Optional Interface: Serial (RS-232), Parallel (IEEE1284), USB2.0, (Full Speed), Ethernet, WLAN (Wi-Fi)
Cash drawer control	1-2 cash drawers

Barcodes Fonts Graphics

Barcodes	1D: UPC-A, UPC-E, EAN-8, EAN-13, CODABAR, Code 39, Code 93, ITF, CODABAR 2D: PDF 417, QR, Maxicode, GS1
Fonts	Font A (12 x 24), Font B (9 x 17), Kanji Font A (24 x 24)
Character set	95 Alphanumeric, 13 types International Characters
Character modification	Rotate (0°, 90°, 180°, 270°), enlarge (1-6X), Emphasize, Underline and Reverse
Graphics printing	Bitmap Image Downloading and Direct Bitmap Image Print RAM Bitmap Download: Buffer Size 128KB, FLASH Bitmap Download: Buffer Size 512 KB

Paper

Paper type	Continuous Paper, Marked Paper
Paper thickness	0.06mm~0.1mm
Paper width	82.5 ± 0.5mm, 80 ± 0.5mm, 76 ± 0.5mm, 69.5 ± 0.5mm, 57 ± 0.5mm
Paper roll OD	Max 83mm
Paper cut	Full Cut, Partial Cut, Tear Off

Power supply

Input	100~240 VAC, 50~60 Hz
Output	24 ± 5%VDC, 2.0A

Reliability

Printer head lifetime	150 KM
Cutter lifetime	1,500,000 cuts (Full Cut, Paper Thickness: 0.07mm)
MCBF	60,000,000 lines
MTBF	360,000 hours

Environment


Operation conditions	5°C to 45°C, 20% to 93%RH (40°C)
Storage conditions	-40°C to 60°C, 20% to 93%RH (40°C)

Physical Specification

Dimensions	200mm(L) x 145mm(W) x 145mm(H)
Weight	Approximately 1.45kg



Application:

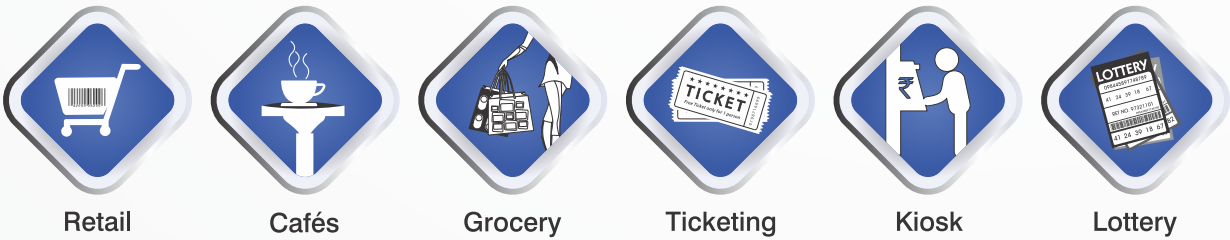

ORDERING INFORMATION

SKU Number	Item Description
3006210037	RP-3150 STAR (with Parallel Interface)
3006210036	RP-3150 STAR (with USB Interface)

OPTIONAL ACCESSORIES

2017140115	Parallel Interface card
2017140116	Ethernet Interface card
2017140117	Wi-Fi Interface card
2017140119	Serial Interface card

TVS Electronics Limited
South Phase, 7A, Second Floor,
Industrial Estate, Guindy, Chennai - 600 032
www.tvs-e.in | Email: sales-support@tvs-e.in

RoHS



© Copyright 2007. TVS Electronics Ltd. All rights reserved. All brand and product names are trademarks or registered trademarks of the respective holders and are hereby recognised as such. All product specifications are subject to change without prior notice.